


LOW PROFILE LIFT TABLE

OPTIMUM DESIGN

FLEXIBLE

IDEAL

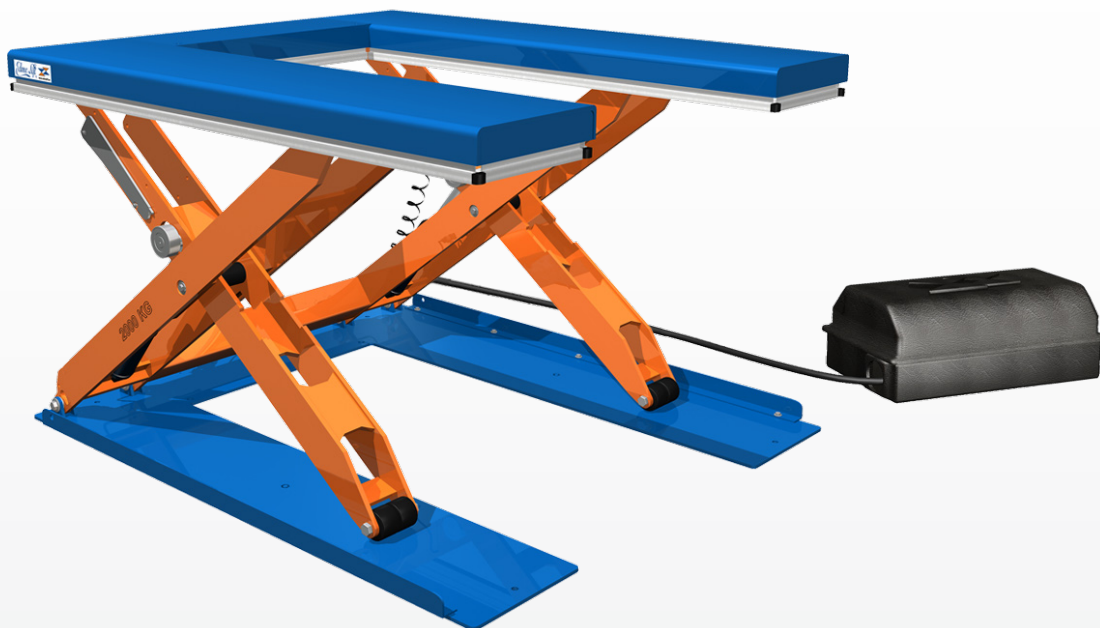

LIFT SOLUTIONS CAN BE FOUND AT EDMOLIFT

EdmoLift's low profile lift table has a low closed height of only 80 mm, meaning that no pit is required. This increases its flexibility with regard to its field of applications and reduces installation costs.

To achieve such an extremely low build height, it has previously been claimed that low profile lift tables have amounted to being a compromise between function and design. This compromise is now a thing of the past. EdmoLift produces a low profile lift table with the functionality level equivalent to that of a conventional lift table. EdmoLift has solved a previous market requirement thanks to a new approach in design and construction. This has been made possible by manufactur-

ing in a high-tech production facility built up on laser technology.

With a variety of designs and models, load capacity of between 600 kilo and 2 metric tons and a lift range from 630 mm to 970 mm, we can offer a very large selection. Models with U or E-shaped platforms are suitable for pallet handling with a hand pallet truck. Low profile lifts with solid lift tables can be adapted with an access ramp when a hand pallet truck or other wheeled equipment is to be rolled on.

These lift tables are available in different colours, with a range of different accessories or control units – all tailored to the

needs and requirements of the customer. Some examples of accessories in this product group are:

Transport and lifting clamp, foot control unit, 1 phase power pack unit and limit switch.

For further information, see our product leaflet "Accessories".

With EdmoLift's low profile lift table, the operator always has the load at the correct working height, thereby helping to achieve a more ergonomically designed work place.

At EdmoLift you can find solutions for all your lifting problems.

PRODUCT INFORMATION



Model	Art.no	Capacity kg	Lift stroke mm	Closed height mm	Length mm	Width mm	Lift time sec	Power	Weight incl. packaging	Notes
TCR 500*	34919	500	630	80	900	600	9	0,75	138	
TCB 600*	33245	600	720	80	1500	900	13	0,75	210	
TCB 600H*	33638	600	970	80	1500	900	19	0,75	210	
TCL 1000*	22252	1000	820	80	1350	800	13	0,75	250	
TCL 1000B*	22250	1000	820	80	1350	1000	13	0,75	275	
TCL 1000GB*	22246	1000	820	80	1350	1270	13	0,75	300	
TCL 2000*	22221	2000	820	100	1350	800	24	0,75	325	
TCL 2000B*	22222	2000	820	100	1350	1000	24	0,75	355	
TCL 2000GB*	22219	2000	820	100	1350	1270	24	0,75	400	

*External powerpack in box.

U- AND E-SHAPED



Model	Art.no	Capacity kg	Lift stroke mm	Closed height mm	Length mm	Width mm	Lift time sec	Power	Weight incl. packaging	Notes
TUB 600*	33250	600	720	80	1450	900	13	0,75	250	E
TUB 600H*	33255	600	970	80	1450	900	19	0,75	250	E
TUL 1000*	22242	1000	820	80	1350	1060	13	0,75	240	U
TUL 2000*	22220	2000	820	100	1350	1160	24	0,75	350	U

*External powerpack in box.

CE- OR MANUFACUTER'S DECLARATION OF CONFORMITY

We construct and manufacture our lift tables and lift trolleys in accordance with the basic requirements in the Lift table standards, EN 1570, and the Lift trolley standards, EN 1757-1 and we comply with the requirements in accordance with Machine, low voltage and the EMC directive. The products are delivered after being tested with the CE certification and the assurance of agreement or in certain cases the manufacturer's declaration of conformity.

PRODUCT FEATURES

- Load capacity max 2000 kg.
- Lift table length from 900 mm to 1500 mm for the standard design. Available with U, E-shaped or solid lift table.
- New generation with 100 mm shorter lift table but with 100 mm extra lift height.
- Quick lifting
- Lifting eye bolts in the base frame for more flexible transportation and installation
- Complies with European safety standard EN 1570 – CE certified.
- 24 V DC control unit and operating device with deadman's switch.
- IP54 approved electrical system.
- Safety spacing between all moving parts.
- Overload protection.
- Adjustable trap prevention safety trip bars on all four sides of the platform.
- Table is equipped with hose burst valves and mechanical locks for servicing and maintenance.
- Maintenance-free bearing surface.
- PLC control for easy adaptation to individual requirements.
- User manual in 20 different languages.