

[65] Work Positioner

Peter lifts 1200 liters of soup every day.



Heavy loads – easy manouvered with a WP

Operates with loads of up to 65Kg. Weight distribution is spread evenly over all four swivelling wheels and with the unit's short wheelbase and light self-weight the WP is the safest and most manoeuvrable lifter on the market! An improvement in the working environment resulting in greater profitability for your company.

- Battery charge indicator mounted centrally on the push handle in direct view
- Dual speed elevation and descent for safer, more efficient control
- Easily customised for your specific requirements – higher lift heights, wider straddles etc
- Options include: box handlers, reel handlers, barrel handlers, sack handlers etc
- Fully compliant with EN1757.1 and CE Marked



[65] Work Positioner



Charger

Charge indicator highlights battery condition and cannot overcharge the battery using an auto-cut-off function. The unit is suitable for most worldwide voltages.




Perfect weight distribution

Due to the lifting mast unique positioning at the rear of the chassis Edmolift have achieved near perfect weight distribution providing unrivalled manoeuvrability. The 100% vertical mast eliminates problems such as platform drift found on other products.



Compact design

The WP features an extremely compact design which is also very easy to clean.

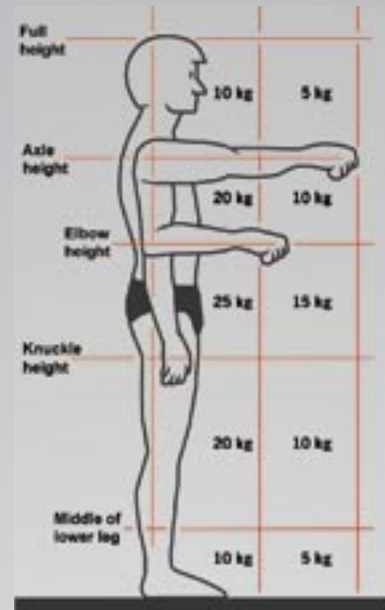

Consider manual handling legislation dictated by the Health & Safety Executive and EU Directives. Repeatedly lifting light items, awkward items and lifting them incorrectly can result in injuries.

Work Positioner - Data

Model	Cap. kg	Max. height mm	Min. height mm	Outer dimensions, mm			Platform L x W mm	Battery	Charger	Weight kg, pack in.
				Length	Width	Height				
WP 65	65	1440	125	735	470	1600	470 x 410	24V/7,2Ah	1,5A/230V	39
WP 85	85	1440	125	735	600	1600	470 x 600	24V/7,2Ah	1,5A/230V	39
WP 85 EM	80	1760	125	795	600	1920	470 x 600	24V/7,2Ah	1,5A/230V	42
WP 105	105	1345	130	845	600	1590	470 x 600	24V/7,2Ah	1,5A/230V	42
WP 105 EM	100	1655	130	845	600	1920	470 x 600	24V/7,2Ah	1,5A/230V	45
WP 105L	105	1345	105	850	600	1590	470 x 600	24V/7,2Ah	1,5A/230V	44
WP 105L EM	100	1655	130	845	600	1920	470 x 600	24V/7,2Ah	1,5A/230V	45
WP 155	155	1345	130	850	600	1590	470 x 600	24V/7,2Ah	1,5A/230V	43
WP 155 EM	150	1655	130	850	600	1920	470 x 600	24V/7,2Ah	1,5A/230V	45
WP 155L	155	1345	105	850	600	1590	470 x 600	24V/7,2Ah	1,5A/230V	44
WP 155L EM	150	1655	105	850	600	1920	470 x 600	24V/7,2Ah	1,5A/230V	49
WP 205	205	1320	105	1015	560	1600	600 x 560	24V/12Ah	1,5A/230V	64

Safety regulations

The EdmoLift products comply with all safety regulations in accordance with EN 1757-1. The CE-mark on EdmoLift's products confirms that they are manufactured in accordance with applicable CE directives. Before deciding which model and design of lift table is required consider all the conditions. Stated max.capacity always regards evenly distributed load. If any accessories and special equipment are required please contact us for information and data.

Work Positioner - Accessories

For all WP models there is a wide choice of accessories – some of these are detailed adjacently.

Please contact us for information on other options.

- "V" cradle (84053) - WP 85, WP 105, WP 155
- Drum turner (84055) - WP 85, WP 105, WP 155
- Reel rotator (84054) - WP 85, WP 105, WP 155
- Mandrel (84050) - WP 85, WP 105
- Ladder (84058) - WP 85, WP 155
- Quick fitting (84320) - all models

[85] Work Positioner

Anna lifts 1500 kg fruit every day.



Heavy loads – easy manouvered with a WP

Operates with loads of up to 85Kg. Weight distribution is spread evenly over all four swivelling wheels and with the unit's short wheelbase and light self-weight the WP is the safest and most manoeuvrable lifter on the market! An improvement in the working environment resulting in greater profitability for your company.

- Battery charge indicator mounted centrally on the push handle in direct view
- Dual speed elevation and descent for safer, more efficient control
- Easily customised for your specific requirements – higher lift heights, wider straddles etc
- Options include: box handlers, reel handlers, barrel handlers, sack handlers etc
- Fully compliant with EN1757.1 and CE Marked



[85] Work Positioner



Charger

Charge indicator highlights battery condition and cannot overcharge the battery using an auto-cut-off function. The unit is suitable for most worldwide voltages.




Perfect weight distribution

Due to the lifting mast unique positioning at the rear of the chassis Edmolift have achieved near perfect weight distribution providing unrivalled manoeuvrability. The 100% vertical mast eliminates problems such as platform drift found on other products.



Compact design

The WP features an extremely compact design which is also very easy to clean.

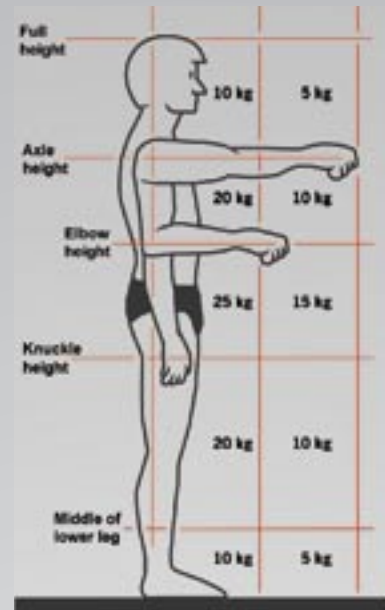

Consider manual handling legislation dictated by the Health & Safety Executive and EU Directives. Repeatedly lifting light items, awkward items and lifting them incorrectly can result in injuries.

Work Positioner - Data

Model	Cap. kg	Max. height mm	Min. height mm	Outer dimensions, mm			Platform L x W mm	Battery	Charger	Weight kg, pack in.
				Length	Width	Height				
WP 65	65	1440	125	735	470	1600	470 x 410	24V/7,2Ah	1,5A/230V	39
WP 85	85	1440	125	735	600	1600	470 x 600	24V/7,2Ah	1,5A/230V	39
WP 85 EM	80	1760	125	795	600	1920	470 x 600	24V/7,2Ah	1,5A/230V	42
WP 105	105	1345	130	845	600	1590	470 x 600	24V/7,2Ah	1,5A/230V	42
WP 105 EM	100	1655	130	845	600	1920	470 x 600	24V/7,2Ah	1,5A/230V	45
WP 105L	105	1345	105	850	600	1590	470 x 600	24V/7,2Ah	1,5A/230V	44
WP 105L EM	100	1655	130	845	600	1920	470 x 600	24V/7,2Ah	1,5A/230V	45
WP 155	155	1345	130	850	600	1590	470 x 600	24V/7,2Ah	1,5A/230V	43
WP 155 EM	150	1655	130	850	600	1920	470 x 600	24V/7,2Ah	1,5A/230V	45
WP 155L	155	1345	105	850	600	1590	470 x 600	24V/7,2Ah	1,5A/230V	44
WP 155L EM	150	1655	105	850	600	1920	470 x 600	24V/7,2Ah	1,5A/230V	49
WP 205	205	1320	105	1015	560	1600	600 x 560	24V/12Ah	1,5A/230V	64

Safety regulations

The EdmoLift products comply with all safety regulations in accordance with EN 1757-1. The CE-mark on EdmoLift's products confirms that they are manufactured in accordance with applicable CE directives. Before deciding which model and design of lift table is required consider all the conditions. Stated max.capacity always regards evenly distributed load. If any accessories and special equipment are required please contact us for information and data.

Work Positioner - Accessories

For all WP models there is a wide choice of accessories – some of these are detailed adjacently.

Please contact us for information on other options.

- "V" cradle (84053) - WP 85, WP 105, WP 155
- Drum turner (84055) - WP 85, WP 105, WP 155
- Reel rotator (84054) - WP 85, WP 105, WP 155
- Mandrel (84050) - WP 85, WP 105
- Ladder (84058) - WP 85, WP 155
- Quick fitting (84320) - all models

[105] Work Positioner

Anders lifts 1500 liters of paint every day.



Heavy loads – easy manouvered with a WP

Operates with loads of up to 105Kg. Weight distribution is spread evenly over all four swivelling wheels and with the unit's short wheelbase and light self-weight the WP is the safest and most manoeuvrable lifter on the market! An improvement in the working environment resulting in greater profitability for your company.

- Battery charge indicator mounted centrally on the push handle in direct view
- Dual speed elevation and descent for safer, more efficient control
- Easily customised for your specific requirements – higher lift heights, wider straddles etc
- Options include: box handlers, reel handlers, barrel handlers, sack handlers etc
- Fully compliant with EN1757.1 and CE Marked



[105] Work Positioner



Charger

Charge indicator highlights battery condition and cannot overcharge the battery using an auto-cut-off function. The unit is suitable for most worldwide voltages.




Perfect weight distribution

Due to the lifting mast unique positioning at the rear of the chassis Edmolift have achieved near perfect weight distribution providing unrivalled manoeuvrability. The 100% vertical mast eliminates problems such as platform drift found on other products.



Compact design

The WP features an extremely compact design which is also very easy to clean.

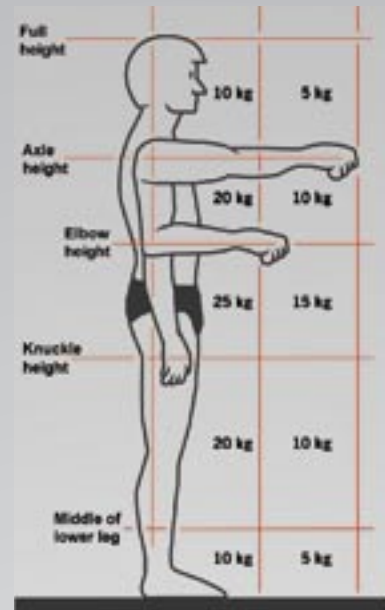

Consider manual handling legislation dictated by the Health & Safety Executive and EU Directives. Repeatedly lifting light items, awkward items and lifting them incorrectly can result in injuries.

Work Positioner - Data

Model	Cap. kg	Max. height mm	Min. height mm	Outer dimensions, mm			Platform L x W mm	Battery	Charger	Weight kg, pack in.
				Length	Width	Height				
WP 65	65	1440	125	735	470	1600	470 x 410	24V/7,2Ah	1,5A/230V	39
WP 85	85	1440	125	735	600	1600	470 x 600	24V/7,2Ah	1,5A/230V	39
WP 85 EM	80	1760	125	795	600	1920	470 x 600	24V/7,2Ah	1,5A/230V	42
WP 105	105	1345	130	845	600	1590	470 x 600	24V/7,2Ah	1,5A/230V	42
WP 105 EM	100	1655	130	845	600	1920	470 x 600	24V/7,2Ah	1,5A/230V	45
WP 105L	105	1345	105	850	600	1590	470 x 600	24V/7,2Ah	1,5A/230V	44
WP 105L EM	100	1655	130	845	600	1920	470 x 600	24V/7,2Ah	1,5A/230V	45
WP 155	155	1345	130	850	600	1590	470 x 600	24V/7,2Ah	1,5A/230V	43
WP 155 EM	150	1655	130	850	600	1920	470 x 600	24V/7,2Ah	1,5A/230V	45
WP 155L	155	1345	105	850	600	1590	470 x 600	24V/7,2Ah	1,5A/230V	44
WP 155L EM	150	1655	105	850	600	1920	470 x 600	24V/7,2Ah	1,5A/230V	49
WP 205	205	1320	105	1015	560	1600	600 x 560	24V/12Ah	1,5A/230V	64

Safety regulations

The EdmoLift products comply with all safety regulations in accordance with EN 1757-1. The CE-mark on EdmoLift's products confirms that they are manufactured in accordance with applicable CE directives. Before deciding which model and design of lift table is required consider all the conditions. Stated max.capacity always regards evenly distributed load. If any accessories and special equipment are required please contact us for information and data.

Work Positioner - Accessories

For all WP models there is a wide choice of accessories – some of these are detailed adjacently.

Please contact us for information on other options.

- "V" cradle (84053) - WP 85, WP 105, WP 155
- Drum turner (84055) - WP 85, WP 105, WP 155
- Reel rotator (84054) - WP 85, WP 105, WP 155
- Mandrel (84050) - WP 85, WP 105
- Ladder (84058) - WP 85, WP 155
- Quick fitting (84320) - all models

[155] Work Positioner



John lifts 2 tons every day.

Heavy loads – easy manouvered with a WP

Operates with loads of up to 155Kg. Weight distribution is spread evenly over all four swivelling wheels and with the unit's short wheelbase and light self-weight the WP is the safest and most manoeuvrable lifter on the market! An improvement in the working environment resulting in greater profitability for your company.

- Battery charge indicator mounted centrally on the push handle in direct view
- Dual speed elevation and descent for safer, more efficient control
- Easily customised for your specific requirements – higher lift heights, wider straddles etc
- Options include: box handlers, reel handlers, barrel handlers, sack handlers etc
- Fully compliant with EN1757.1 and CE Marked



[155] Work Positioner



Charger

Charge indicator highlights battery condition and cannot overcharge the battery using an auto-cut-off function. The unit is suitable for most worldwide voltages.




Perfect weight distribution

Due to the lifting mast unique positioning at the rear of the chassis Edmolift have achieved near perfect weight distribution providing unrivalled manoeuvrability. The 100% vertical mast eliminates problems such as platform drift found on other products.



Compact design

The WP features an extremely compact design which is also very easy to clean.

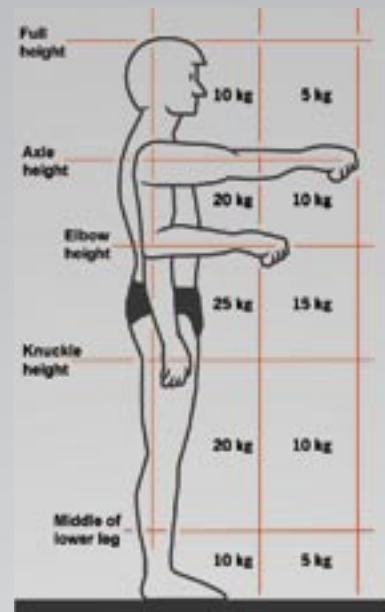

Consider manual handling legislation dictated by the Health & Safety Executive and EU Directives. Repeatedly lifting light items, awkward items and lifting them incorrectly can result in injuries.

Work Positioner - Data

Model	Cap. kg	Max. height mm	Min. height mm	Outer dimensions, mm			Platform L x W mm	Battery	Charger	Weight kg, pack in.
				Length	Width	Height				
WP 65	65	1440	125	735	470	1600	470 x 410	24V/7,2Ah	1,5A/230V	39
WP 85	85	1440	125	735	600	1600	470 x 600	24V/7,2Ah	1,5A/230V	39
WP 85 EM	80	1760	125	795	600	1920	470 x 600	24V/7,2Ah	1,5A/230V	42
WP 105	105	1345	130	845	600	1590	470 x 600	24V/7,2Ah	1,5A/230V	42
WP 105 EM	100	1655	130	845	600	1920	470 x 600	24V/7,2Ah	1,5A/230V	45
WP 105L	105	1345	105	850	600	1590	470 x 600	24V/7,2Ah	1,5A/230V	44
WP 105L EM	100	1655	130	845	600	1920	470 x 600	24V/7,2Ah	1,5A/230V	45
WP 155	155	1345	130	850	600	1590	470 x 600	24V/7,2Ah	1,5A/230V	43
WP 155 EM	150	1655	130	850	600	1920	470 x 600	24V/7,2Ah	1,5A/230V	45
WP 155L	155	1345	105	850	600	1590	470 x 600	24V/7,2Ah	1,5A/230V	44
WP 155L EM	150	1655	105	850	600	1920	470 x 600	24V/7,2Ah	1,5A/230V	49
WP 205	205	1320	105	1015	560	1600	600 x 560	24V/12Ah	1,5A/230V	64

Safety regulations

The EdmoLift products comply with all safety regulations in accordance with EN 1757-1. The CE-mark on EdmoLift's products confirms that they are manufactured in accordance with applicable CE directives. Before deciding which model and design of lift table is required consider all the conditions. Stated max.capacity always regards evenly distributed load. If any accessories and special equipment are required please contact us for information and data.

Work Positioner - Accessories

For all WP models there is a wide choice of accessories – some of these are detailed adjacently.

Please contact us for information on other options.

- "V" cradle (84053) - WP 85, WP 105, WP 155
- Drum turner (84055) - WP 85, WP 105, WP 155
- Reel rotator (84054) - WP 85, WP 105, WP 155
- Mandrel (84050) - WP 85, WP 105
- Ladder (84058) - WP 85, WP 155
- Quick fitting (84320) - all models

[205] Work Positioner

Magnus lifts 200 boxes every day.

Heavy loads – easy manouvered with a WP

Operates with loads of up to 205Kg. Weight distribution is spread evenly over all four swivelling wheels and with the unit's short wheelbase and light self-weight the WP is the safest and most manoeuvrable lifter on the market! An improvement in the working environment resulting in greater profitability for your company.

- Battery charge indicator mounted centrally on the push handle in direct view
- Dual speed elevation and descent for safer, more efficient control
- Easily customised for your specific requirements – higher lift heights, wider straddles etc
- Options include: box handlers, reel handlers, barrel handlers, sack handlers etc
- Fully compliant with EN1757.1 and CE Marked



[205] Work Positioner



Charger

Charge indicator highlights battery condition and cannot overcharge the battery using an auto-cut-off function. The unit is suitable for most worldwide voltages.




Perfect weight distribution

Due to the lifting mast unique positioning at the rear of the chassis Edmolift have achieved near perfect weight distribution providing unrivalled manoeuvrability. The 100% vertical mast eliminates problems such as platform drift found on other products.



Compact design

The WP features an extremely compact design which is also very easy to clean.

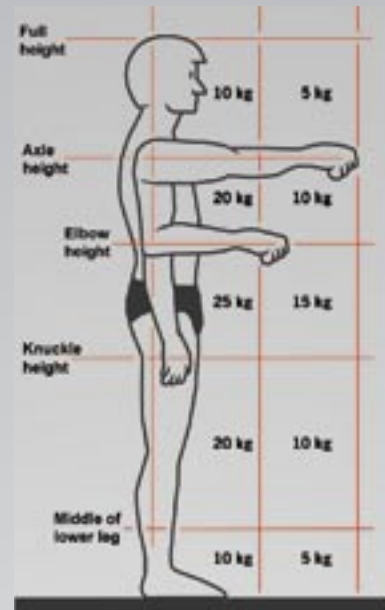

Consider manual handling legislation dictated by the Health & Safety Executive and EU Directives. Repeatedly lifting light items, awkward items and lifting them incorrectly can result in injuries.

Work Positioner - Data

Model	Cap. kg	Max. height mm	Min. height mm	Outer dimensions, mm			Platform L x W mm	Battery	Charger	Weight kg, pack in.
				Length	Width	Height				
WP 65	65	1440	125	735	470	1600	470 x 410	24V/7,2Ah	1,5A/230V	39
WP 85	85	1440	125	735	600	1600	470 x 600	24V/7,2Ah	1,5A/230V	39
WP 85 EM	80	1760	125	795	600	1920	470 x 600	24V/7,2Ah	1,5A/230V	42
WP 105	105	1345	130	845	600	1590	470 x 600	24V/7,2Ah	1,5A/230V	42
WP 105 EM	100	1655	130	845	600	1920	470 x 600	24V/7,2Ah	1,5A/230V	45
WP 105L	105	1345	105	850	600	1590	470 x 600	24V/7,2Ah	1,5A/230V	44
WP 105L EM	100	1655	130	845	600	1920	470 x 600	24V/7,2Ah	1,5A/230V	45
WP 155	155	1345	130	850	600	1590	470 x 600	24V/7,2Ah	1,5A/230V	43
WP 155 EM	150	1655	130	850	600	1920	470 x 600	24V/7,2Ah	1,5A/230V	45
WP 155L	155	1345	105	850	600	1590	470 x 600	24V/7,2Ah	1,5A/230V	44
WP 155L EM	150	1655	105	850	600	1920	470 x 600	24V/7,2Ah	1,5A/230V	49
WP 205	205	1320	105	1015	560	1600	600 x 560	24V/12Ah	1,5A/230V	64

Safety regulations

The EdmoLift products comply with all safety regulations in accordance with EN 1757-1. The CE-mark on EdmoLift's products confirms that they are manufactured in accordance with applicable CE directives. Before deciding which model and design of lift table is required consider all the conditions. Stated max.capacity always regards evenly distributed load. If any accessories and special equipment are required please contact us for information and data.

Work Positioner - Accessories

For all WP models there is a wide choice of accessories – some of these are detailed adjacently.

Please contact us for information on other options.

- "V" cradle (84053) - WP 85, WP 105, WP 155
- Drum turner (84055) - WP 85, WP 105, WP 155
- Reel rotator (84054) - WP 85, WP 105, WP 155
- Mandrel (84050) - WP 85, WP 105
- Ladder (84058) - WP 85, WP 155
- Quick fitting (84320) - all models